



Atrust 11.6" Mobile Thin Client mt168W



1 Internal Microphone

Built-in microphone for audio input.

2 Keyboard

Built-in keyboard for control and input.

3 Touch Pad

Built-in pointing device for control and input.

4 Power Button / Power LED

Press to turn on the client / Indicates the status of power.

5 Speakers

Built-in speaker for audio output.

6 DC IN

Connects to an AC adaptor.

7 VGA Port

Connects to an external display.

8 USB 3.0 Port

Connects to a USB device.

9 Microphone / Headphone Port

Connects to a microphone / a set of headphones or a speaker system.

10 USB 2.0 Port x 2

Connects to a USB device.


11 LAN Port

Connects to a host server through a LAN switch.

12 Kensington Lock Slot

Connects a Kensington cable to secure the mobile thin client.

Atrust mt168W Features

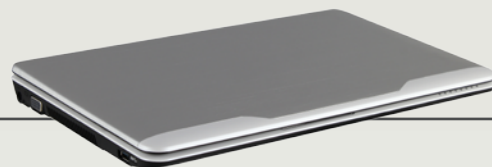

▶ **Low total cost of ownership**

Additional computing access is as simple as adding more thin client devices. The total cost of ownership is then drastically reduced.

▶ **Simple click and play**

Connects this device to the host server with a Remote Desktop connection. Just click the shortcut for a Remote Desktop session, you can immediately start a session and enjoy the computing resources.

▶ **Rich remote user experience**

Support Citrix® HDX/ICA™, Microsoft® RDP™ with RemoteFX™ and VMware® Horizon View™, this device can provide a rich and efficient computing experience.

▶ **Easy management and maintenance**

Since all computing tasks are mainly performed on a server, all hardware and software issues are significantly reduced on the client side. All user management, software installations, system management, and upgrades are done on a single server.

Atrust mt168W Mobile Thin Client

System	
Processor	Intel® Bay Trail Dual Core 1.58GHz
Memory	
System memory	2GB (Manufacturing option : 4GB)
Flash memory	8GB (Manufacturing option : 16GB, 32GB)
Display	
LCD Type/Resolution	11.6" 16:9 Glare / 1366 x 768 pixel, LED Backlight
I/O Interfaces	
I/O ports	1 x VGA, 1 x USB 3.0, 2 x USB 2.0, 1 x Headphone port, 1 x Microphone port, 1 x Internal microphone, 1 x RJ-45, 1 x DC IN
Networking	
Ethernet	10/100/1000Mb
Wireless	802.11a/b/g/n
Keyboard	Keyboard 87 keys
Touch Pad	Glide, 2 buttons
Dimensions / Weight	
Dimensions	(W) 297 x (D) 193 x (H) 36 mm (Excluding protrusions)
Weight	1.18kg (approximate)
Environment	
Operating temperature	0°C ~ 35°C
Non-operating temperature	-30°C ~ 60°C
Operating humidity (Rh)	10% ~ 90% (non-condensing)
Non-operating humidity (Rh)	5% ~ 95%
AC Adaptor	
Operating voltage range	100 ~ 240 VAC
Rated line frequency	50 ~ 60 Hz
AC Adaptor	19V, 40W, 2.1A
Battery capacity	2800mAh, 31Wh (Battery Pack)
Software	
Operating system	Windows® Embedded 8 Standard (WE8S)
Management	Atrust Device Manager (ADM) / Atrust Client Setup (ACS)
Protocols	Citrix® ICA/HDX™, Microsoft® RDP™ with RemoteFX™, VMware® Horizon View™
Regulatory	
	VCCI

© 2015 Atrust Computer Corp. The information contained herein is subject to change without notice. Atrust shall not be liable for technical or editorial errors or omissions contained herein. Microsoft and Windows are trademarks of the Microsoft group of companies. Citrix and ICA/HDX are trademarks of Citrix Systems, Inc.. VMware and Horizon View are trademarks of VMware, Inc.. To learn more, visit www.atrustcorp.com.