


REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE

RoHS COMPLIANT

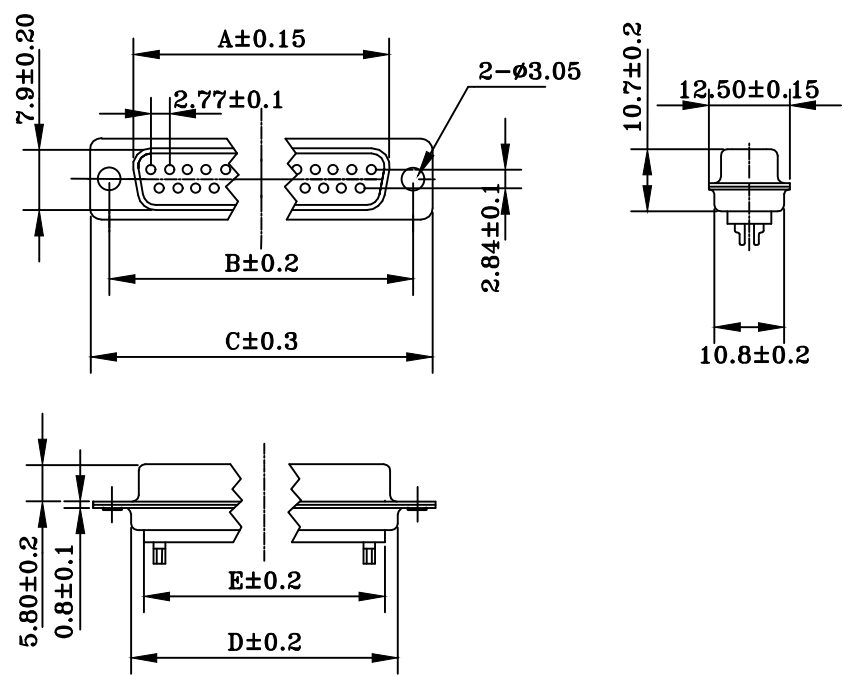

Product Specification


Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0 rated
 Contact : Copper alloy
 Front shell : Steel, 100u" Tin Over 50u" min Copper
 Back shell : Steel, 100u" Tin Over 50u" min Copper
 Contact area: 3u Selective gold

Electrical

Contact Resistance : 20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance : 1000
 magohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Volatge Rating : 250 VAC/rms 60Hz

- 1、加前铆(不通孔) 2、加后铆(通孔)

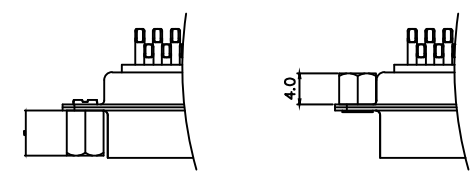

POS.	A	B	C	D	E
09	16.33	24.99	30.81	19.28	15.60
15	24.66	33.32	39.14	27.65	24.60
25	38.32	47.04	53.04	41.03	38.00
37	54.84	63.50	69.32	57.44	54.50

 Seconn International Enterprise Co., Ltd.							
TOLERANCES			 UNIT mm	TITLE			
x. = ±0.38	x.° ± 3.0°			D-SUB DB 9, 15, 25 and 37 Pin Series Female Solder Type Connector 車針			
x.x = ±0.25	.x° ± 1.0°						
x.xx = ±0.13	.xx° ± ---						
x.xxx = ±---	.xxx° ± ---			DRAWN	Jack Chen	DATE	2005/06/08
				PART NO.	DSUB-SDB-XXFSG		
SCALE	NONE	SIZE	A3	SHEET	1/1	REV	A