

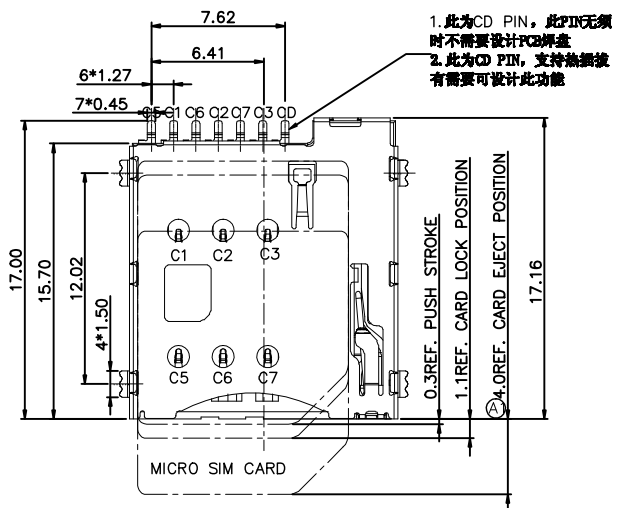
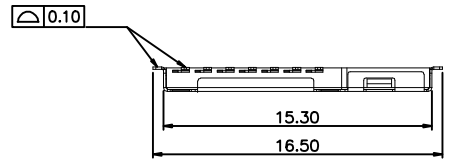



REV	DATE	ECN NO.	MODIFICATION	APPROVER
A	2016/10/14		NEW	Jason_Lee
A1	2017/05/15	RD00317051501	SIZE CHANGE	Jason_Lee

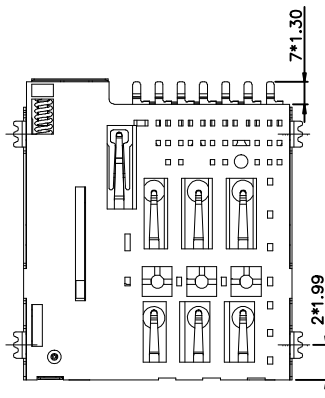

1. 此为CD PIN, 此PIN无须时不需要设计PCB焊盘
 2. 此为CD PIN, 支持热插拔有需要可设计此功能




NOTES:
 MATERIAL:
 Housing: High Temperature thermoplastic, UL94V-0
 Terminal: Copper Alloy
 Shell: Stainless
 SPECIALITY:
 Rated Current: 0.5A MAX
 Rated Voltage: 50V
 Ambient Temperature Range: -20°C~+60°C
 storage Temperature Range: -40°C~+70°C
 Ambient Humidity Range: 95% R.H. Max.
 Contact Resistance: 100mΩ Max
 Insulation Resistance: 1000MΩ/250V DC
 Dielectric Withstanding Voltage: 500V AC
 Durability: 5000 cycles
 Temperature 260±5°C

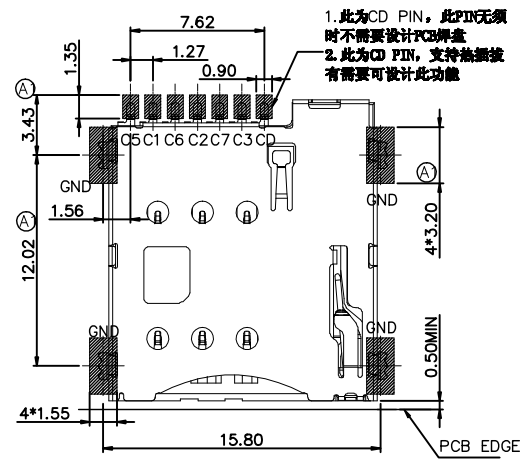



1. 此为CD PIN, 此PIN无须时不需要设计PCB焊盘
 2. 此为CD PIN, 支持热插拔有需要可设计此功能

■ SMT SOLDER AREA
 THERE SHOULD NOT BE ANY CIRCUITRIES IN THE LAYOUT SPACE OF THE PRODUCTS

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05

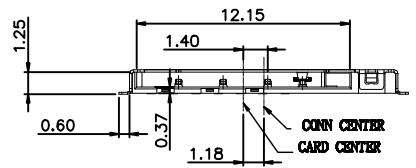

IN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

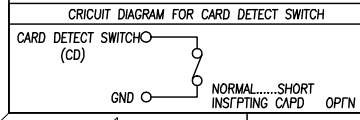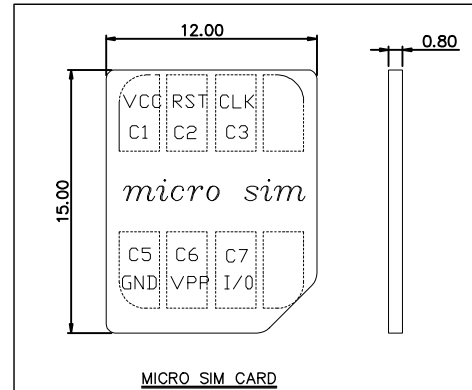

Seconn International Enterprise Co., Ltd.

TOLERANCES			PROJECTION	TITLE				
x.	= ± 1.00	Angle ± 2.0°		Micro SIM Card Connector 6 Pin Push Push SMT H:1.35mm with Detect Pin No Pillars				
x.x	= ± 0.50							UNIT
x.xx	= ± 0.25							mm
x.xxx	= ± 0.15							
DRAWN	JACK	DATE	2017/05/15	PART NO.	MSIM-S62C-01200			
SCALE	1:1	SIZE	A4	SHEET	1/1	REV	A1	