


Simplex 5.0 mm Plastic Fiber Optical

Specifications

Simplex Cord

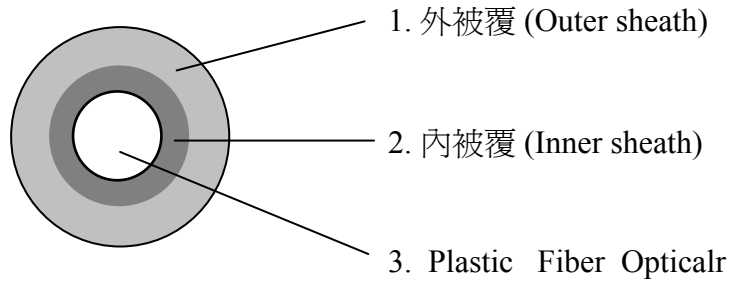

Fiber types	Core Clad	Polymethyl Methacryate (PMMA)
		Fluorinated polymer
Diameter,mm		$1.0 \leq 0.06$
Attenuation at 650nm		0.2dB/m
Inner sheath		PE
Inner diameter ,mm		$2.2\text{mm} \leq 0.05$
Sheath Color		BLACK
Outer sheath		PVC
Outer diameter ,mm		$5.0\text{mm} \leq 0.05$
Sheath Color		BLACK
Maximum Crush Radius.,	N/cm	0.5
Cable Length	KM	0.5
Cable weight	KG	≤ 13
Storage, installation, operating temperature		-40~+75°C

修 訂 紀 錄			審核	確認	製訂
版 次	日 期	修 訂 內 容			

超昱光電科技股份有限公司

新竹縣新豐鄉鳳坑村坑子口571-1號

TEL:03-5571991代表號 FAX:03-5571992

BAYLITE OPTO - ELECTRONICS
TECHNOLOGY CO.,LTD.

571-1, KUNG-TZU-KAO,LIN 1,FENG-
KUN VILLAGE,SHIN-FENG HSIANG,
SHIN-JU HSIEN,TAIWAN